


## PART No: TMD\_HR

Thorworld Handrails can be incorporated into Modular Docks and Levellers in order to increase the safety while personnel are using the loading equipment. Fork Truck Rave (TMD-FTR) can also be included if required.

MATERIAL	STEEL
WEIGHT	19 Kg/m
ESTIMATED LEADTIME	6 - 8 Weeks
OPTIONAL EXTRAS	Can be used in conjunction with: TMD-SM Standard Module TMD-DL Dock Leveller Module

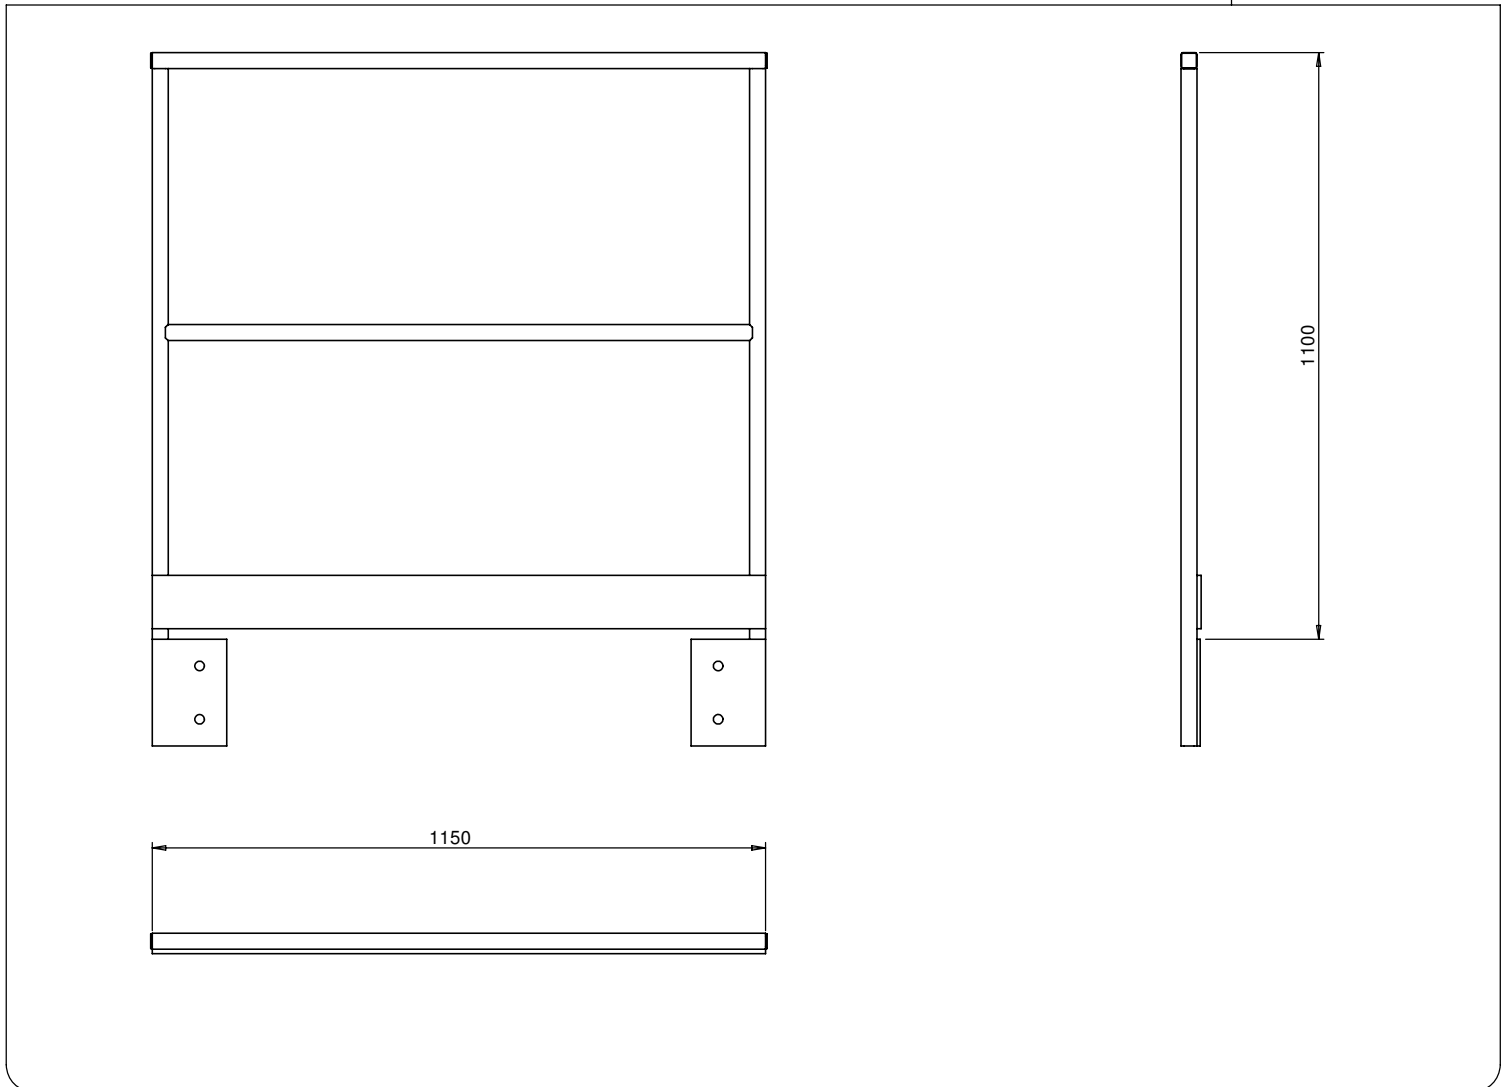

All dimensions shown are in millimetres and are intended for reference purposes only; exact product measurements may vary due to applied tolerances and methods of manufacture

