

## PART No: TDL-4L

LED Technology meaning low energy consumption and a long lifespan  
24V operation. Supplied with 4m of cable for electrical installation.


MATERIAL	ABS casing
----------	------------

WEIGHT	4 Kg
--------	------


ESTIMATED LEADTIME	EX STOCK
--------------------	----------

OPTIONAL EXTRAS	Can be used with our wheel chock with built in movement switch (TWC-5) or other control systems. All control systems to be supplied/ installed by others.
-----------------	--

© EC European Community Registered Design 000321161-0001

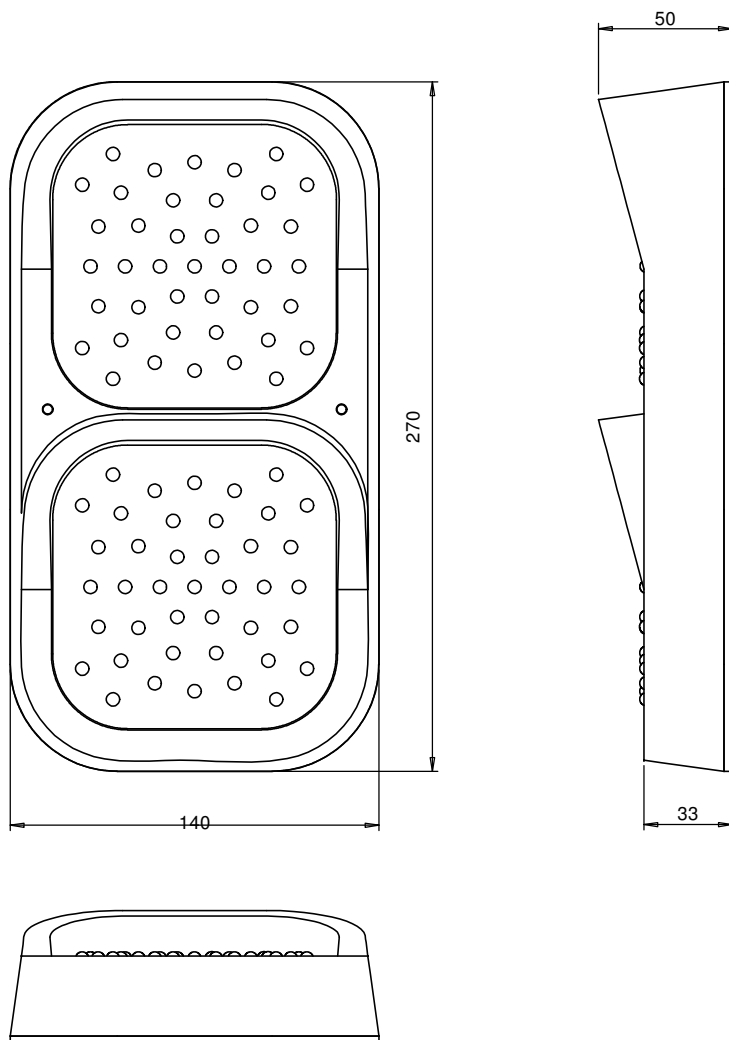

Model	Description	Weight KG
TDL-4L-24-N/S	24 LED per array without sensor	4
TDL-4L-TB	100-240V AC - 24V DC Transformer	4

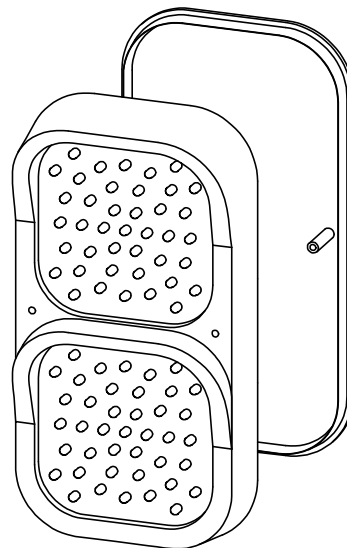

All dimensions shown are in millimetres and are intended for reference purposes only;  
exact product measurements may vary due to applied tolerances and methods of manufacture



Telephone: +44 (0) 1246 260981

Fax: +44 (0) 1246 260493

Email: [info@thorworld.co.uk](mailto:info@thorworld.co.uk)